


TRACTOR
QUICK
ALL QUICK ALL GREAT

Kubota
Japan's technology since 1890

2025

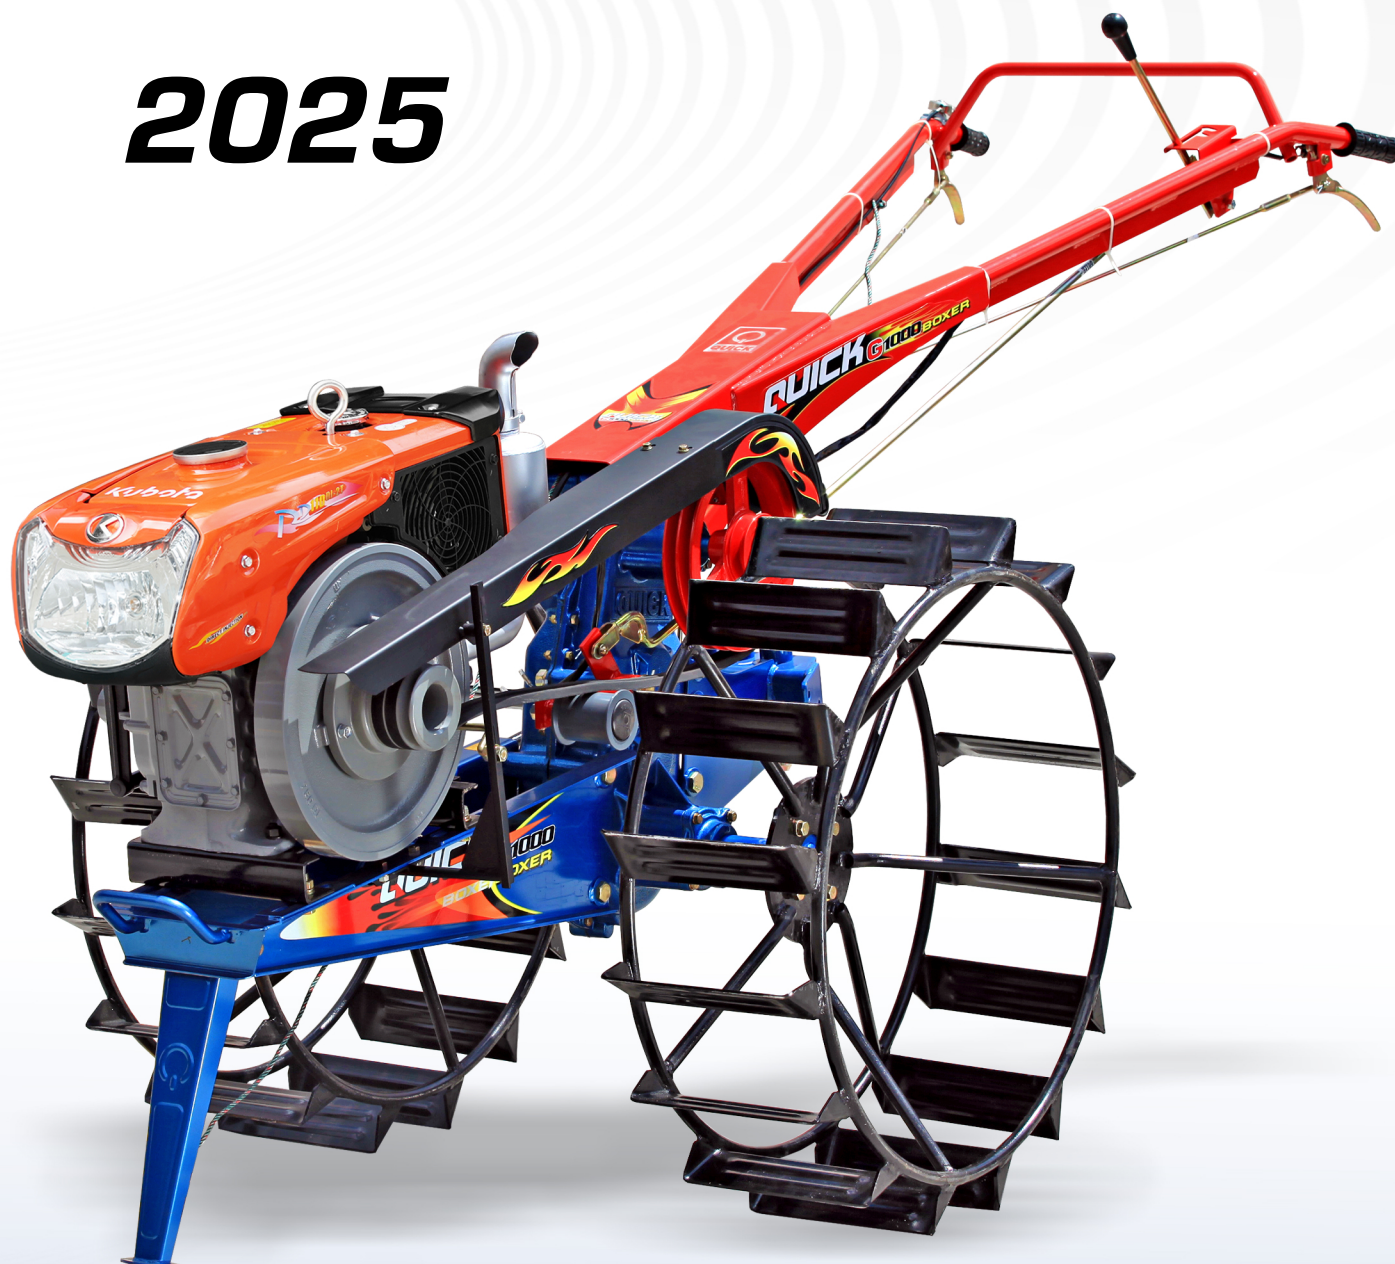

G1000
BOXER

11 HP

For: Dry Field / Wet Field / Transportation



Manufactured By :
CV KARYA HIDUP SENTOSA
144 Magelang St. Yogyakarta, Indonesia 55241
Phone. : (0274) 512 095, 514 085 | Fax. : (0274) 563 523
Email : operator1@quick.co.id
www.quick.co.id Quick Traktor @quicktraktor
Quick Traktor tokoquick.id



SPECIFICATIONS

ENGINE SPECIFICATION

Make :	KUBOTA Manufacture by PT. KUBOTA INDONESIA
Model:	RD 110 DI-2T
Type:	1 piston Horizontal Diesel Cylinder (4 Stroke)
Engine capacity:	598cc
Year of Manufacture:	2025
Maximum Output (HP/RPM):	11 HP/2400 RPM
Counter Balancing tool:	2 Axial Counterbalance
Fuel:	Diesel Fuel
Starting	Manual Starter
Combustion System:	Direct Injection
Cooling System:	Water cooling system with Radiator
Fuel Tank Capacity (liters):	11 liters
Lubricant Volume (liters):	2,8 liters
Lamp:	IC Regulator
Weight (kg):	106 kg



POWER TILLER SPECIFICATION

Make / Model:	QUICK Manufacture by CV. KARYA HIDUP SENTOSA/ G1000 BOXER
Speed:	1 Forward Speed - 2 change pulley paths (1 Reverse Optional)
Transmission System:	Combination (Gear-Chain)
Gear Case:	Casting Dual part system
Main Clutch:	V-Belt & Tension Pulley
Steering Clutch:	Dog Clutch
Dimension with Tire/Cage Wheel	Tire / Cage Wheel
Overall Length (mm):	2732 / 2732 mm
Width (mm): With tire/Cage wheel	850 / 1130 mm
Height (mm): With tire/Cage wheel	1275 / 1410
Overall Weight with Engine (tire/Cage wheel attached) (kg):	279.6 / 318 Kg



STANDARD MATCHING IMPLEMENTS


Standard Iron Wheel cage:	Diameter 893 mm, Width= 285 mm, Number of track=16
Rubber Wheels/Tire Size:	5.5-13
Mould board plough	Mould board plough(±3mm): Length=632mm, Width=368mm, Height=671mm, cultivation width =360mm
Rake/Leveller:	Rake/Leveller (±6mm): Length=608mm, Width=1900mm, Height=685mm, cultivation width =1890mm
Super Parabolic Plow	Disc Plow Standard model(±3mm): Length=1179mm, Width=523mm, Height=630mm
Hitch II model "L"	Hitch II model "L" (to reach the outskirts)
PUDDLER	PUDDLER(±4,5mm): Length=863mm, Width=1280mm, Height=601mm, cultivation width =1150mm

STANDARD MATCHING IMPLEMENTS

**G1000
BOXER
11 HP**

Kubota
Japan's technology since 1890

STANDARD EQUIPMENT ▼




Standard Cage Wheel with Locator



Tire




Mould Board Plough



Leveller



Puddler with special rubber bushing

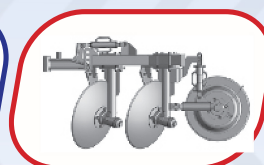


Super Disc Plow



HITCH II (Model "L") To reach the side of land


OPTIONAL EQUIPMENT ▶



Long Track Cage Wheel (for very deep soil)



Wide Track Cage Wheel (for deep soil)



Planter

SIMBA AUTOMOTIVES LTD.

Mob: +256 758 122 122
Toll Free: +256 800 333 666
Plot No. 84, Kira Rd. Kampala - Uganda
Email: info@simbaautomotives.com
Web: www.simbaautomotives.com