


TRACTOR
QUICK
ALL QUICK ALL GREAT

Kubota
Japan's technology since 1890

2025

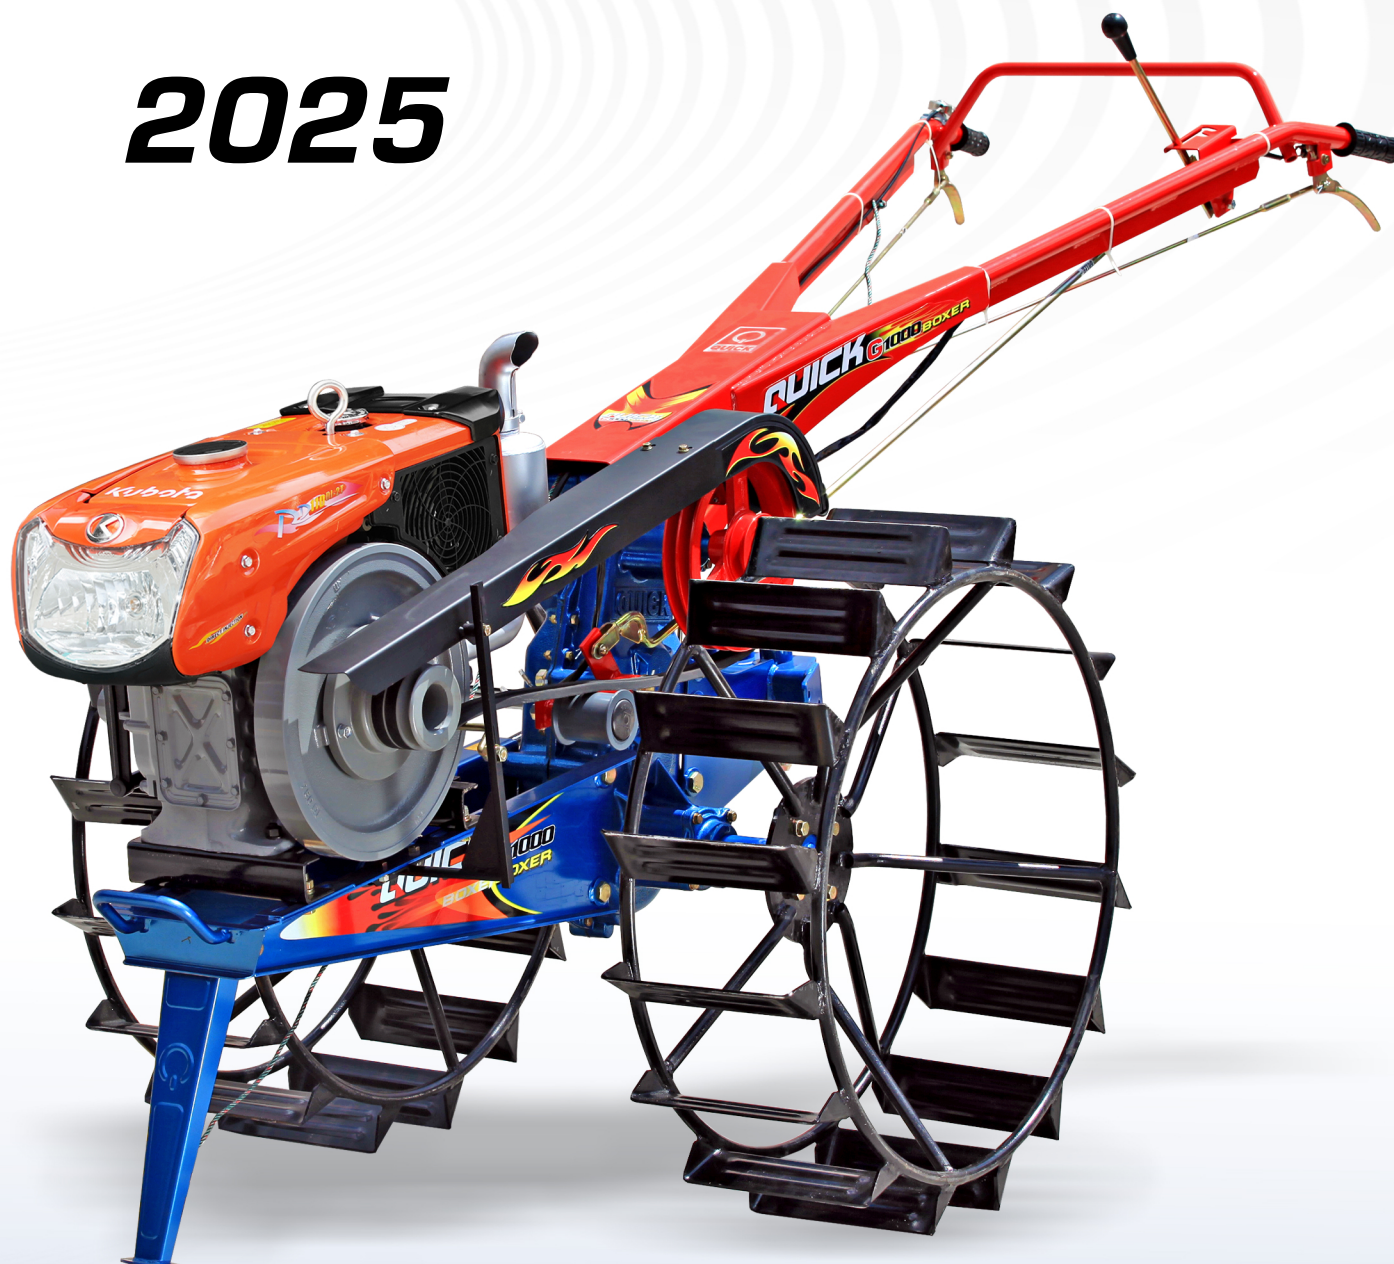

G1000 **BOXER** **11 HP**

For: Dry Field / Wet Field / Transportation



Manufactured By :
CV KARYA HIDUP SENTOSA
144 Magelang St. Yogyakarta, Indonesia 55241
Phone. : (0274) 512 095, 514 085 | Fax. : (0274) 563 523
Email : operator1@quick.co.id
www.quick.co.id Quick Traktor @quicktraktor
Quick Traktor tokoquick.id



SPECIFICATIONS

ENGINE SPECIFICATION

Make :	KUBOTA Manufacture by PT. KUBOTA INDONESIA
Model:	RD 110 DI-2T
Type:	1 piston Horizontal Diesel Cylinder (4 Stroke)
Engine capacity:	598cc
Year of Manufacture:	2025
Maximum Output (HP/RPM):	11 HP/2400 RPM
Counter Balancing tool:	2 Axial Counterbalance
Fuel:	Diesel Fuel
Starting	Manual Starter
Combustion System:	Direct Injection
Cooling System:	Water cooling system with Radiator
Fuel Tank Capacity (liters):	11 liters
Lubricant Volume (liters):	2,8 liters
Lamp:	IC Regulator
Weight (kg):	106 kg



POWER TILLER SPECIFICATION

Make / Model:	QUICK Manufacture by CV. KARYA HIDUP SENTOSA/ G1000 BOXER
Speed:	1 Forward Speed (2 change pulley paths)
Transmission System:	Combination (Gear-Chain)
Gear Case:	Casting Dual part system
Main Clutch:	V-Belt & Tension Pulley
Steering Clutch:	Dog Clutch
Dimension with Tire/Cage Wheel	Tire / Cage Wheel
Overall Length (mm):	2732 / 2732 mm
Width (mm): With tire/Cage wheel	850 / 1130 mm
Height (mm): With tire/Cage wheel	1275 / 1410
Overall Weight with Engine (tire/Cage wheel attached) (kg):	279.6 / 318 Kg




STANDARD MATCHING IMPLEMENTS

Standard Iron Wheel cage:	Diameter 893 mm, Width= 285 mm, Number of track=16
Rubber Wheels/Tire Size:	5.5-13
Mould board plough	Mould board plough(±3mm): Length=632mm, Width=368mm, Height=671mm, cultivation width =360mm
Rake/Leveller:	Rake/Leveller (±6mm): Length=608mm, Width=1900mm, Height=685mm, cultivation width =1890mm
Super Parabolic Plow	Disc Plow Standard model(±3mm): Length=1179mm, Width=523mm, Height=630mm
Hitch II model "L"	Hitch II model "L" (to reach the outskirts)
PUDDLER	PUDDLER(±4,5mm): Length=863mm, Width=1280mm, Height=601mm, cultivation width =1150mm

**G1000
BOXER
11 HP**

Kubota
Japan's technology since 1890

STANDARD EQUIPMENT




Standard Cage Wheel with Locator



Tire




Mould Board Plough



Leveller



Puddler with special rubber bushing



Super Disc Plow




HITCH II (Model "L") To reach the side of land


OPTIONAL EQUIPMENT



Long Track Cage Wheel (for very deep soil)



Wide Track Cage Wheel (for deep soil)



Planter

SIMBA AUTOMOTIVES LTD.

Mob: +256 758 122 122
Toll Free: +256 800 333 666
Plot No. 84, Kira Rd. Kampala - Uganda
Email: info@simbaautomotives.com
Web: www.simbaautomotives.com